

WM<sub>2</sub> 


Train and traction transformers

## Basics

- Layer windings and (horizontal) disc windings
- Strip insulation feeder
- 2 separate wire guides for twin-windings
- 2 separate wire pressing devices
- Backwards movable tailstock for easy loading and unloading

## Options

- Pivoting wire dereelers
- Movable dereelers for CTC, flat and round wires
- Vertically movable traverse
- Flat wire brakes

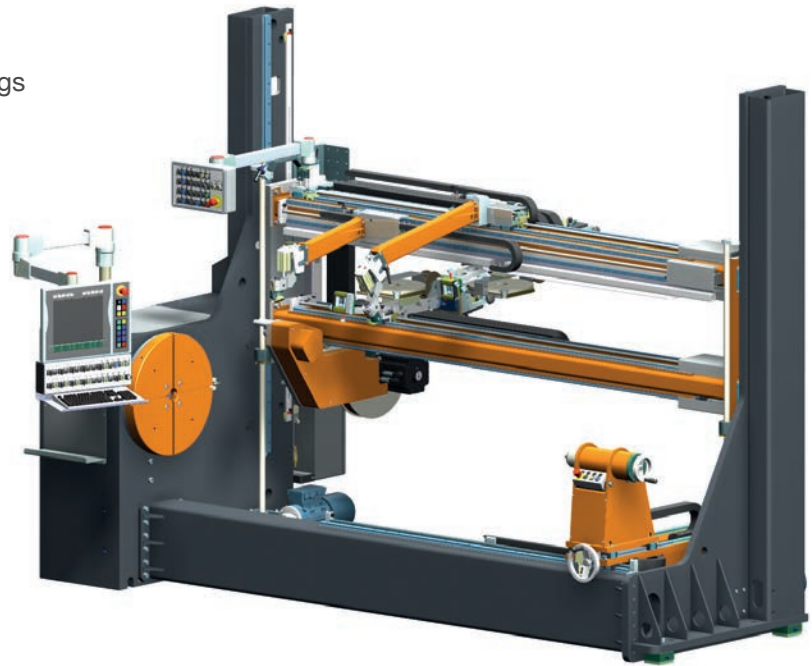

## Coil

Coil diameter	60 – 1,200 mm / 2" – 47"
Coil width	250 – 1,300 mm / 9.8" – 74.8"
Total coil weight	2,500 kg / 5,500 lbs

## Wire

Wire dimensions	Round: $\varnothing$ 1.5 – 3.0 mm / 0.06 – 0.118" Rectangular: 2.7 × 1.5 mm – 16.0 × 6.0 mm 0.106" × 0.059" – 0.63" × 0.236" Radial: 4.5 – 18 mm / 0.177" – 0.709" Axial: 4.0 – 26 mm / 0.157" – 1.024"
Number of wire guides	2
Number of wire pressing devices	2

## Basic Data

Strip material	Paper, Nomex
Strip width	12 – 60 mm / 0.472" – 2.362"
Strip thickness	0.05 – 0.18 mm / 0.0019" – 0.007"
Winding speed	Up to 70 RPM

Machines with different specifications are available on request.